


LOCA

E62020 – MINI MONO BASIN MIXER



Specification

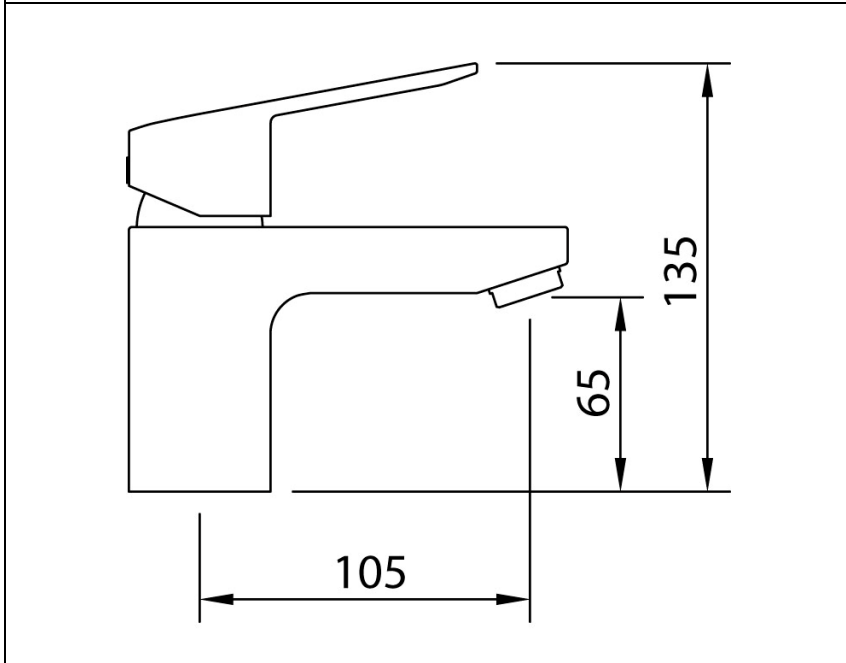






| | |
|-----------------------|---------------------------------------------------|
| Finish | Chrome |
| Body | Brass |
| Fittings | Metal plate, washer, stud & locking nut |
| Connection | M10 - DN8 Flexible hoses - 1/2" BSP threaded ends |
| Min dynamic pressure | 0.1 |
| Max dynamic pressure | 6 |
| Max static pressure | 16 |
| Max water temperature | 60°C |

Flow rates


| Pressure | 0.1 | 0.5 | 1 | 3 |
|----------|-----|-----|------|------|
| L/min | 4.1 | 9.2 | 13.1 | 23.3 |

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

| | | | |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  Guarantee |  Low Pressure |  Flexible Hose |  Click Waste |
|  Flow Straightener |  Flow Aerator |  Single Flow | |

Certifications


| | |
|---------------------------------------------------------------------------------------|--|
|  | |
| Tested @ 0.2bar | |



www.esteembathrooms.com

LOCA

E62021 – MONO BASIN MIXER

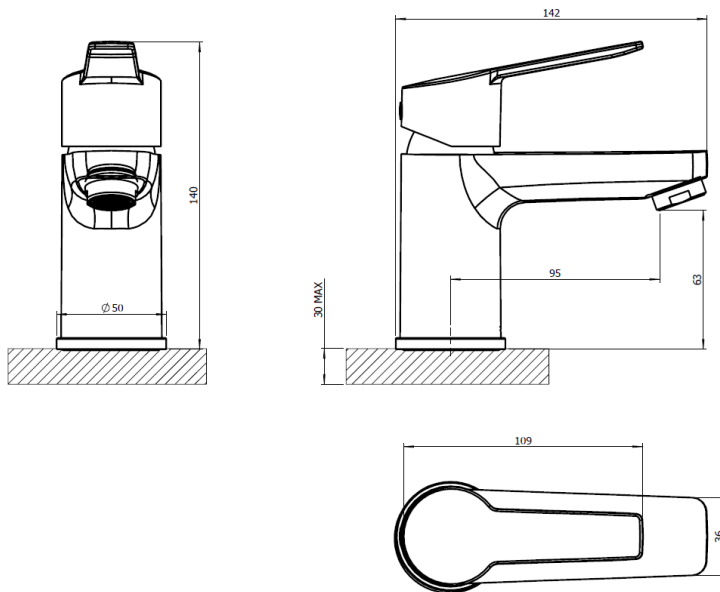

Specification

| | |
|-----------------------|---------------------------------------------------|
| Finish | Chrome |
| Body | Brass |
| Fittings | Metal plate, washer, stud & locking nut |
| Connection | M10 - DN8 Flexible hoses - 1/2" BSP threaded ends |
| Min dynamic pressure | 0.1 |
| Max dynamic pressure | 6 |
| Max static pressure | 16 |
| Max water temperature | 60°C |

Flow rates

| Pressure | 0.1 | 0.5 | 1 | 3 |
|----------|-----|-----|------|------|
| L/min | 2.4 | 8.2 | 12.2 | 21.9 |

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

| | | | |
|-------------------|--------------|---------------|-------------|
| 10 YEAR Guarantee | Low Pressure | Flexible Hose | Click Waste |
| Flow Straightener | Flow Aerator | Single Flow | |


Certifications

| | |
|------------------|--|
| 5.0 l/min | |
| Tested @ 0.2 bar | |



LOCA

E62022 – BASIN TAP PAIR

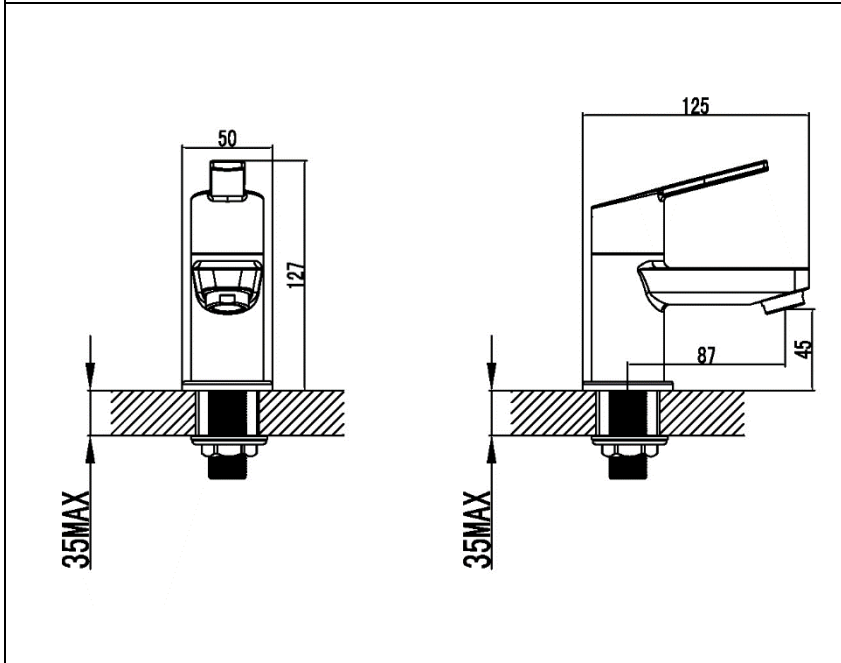

Specification

| | |
|------------|------------------------|
| Finish | Chrome |
| Body | Brass |
| Fittings | Metal backnut & washer |
| Connection | 1/2" BSP Threaded tail |

| | |
|-----------------------|------|
| Min dynamic pressure | 0.1 |
| Max dynamic pressure | 6 |
| Max static pressure | 16 |
| Max water temperature | 60°C |

Flow rates

| Pressure | 0.1 | 0.5 | 1 | 3 |
|----------|-----|-----|----|------|
| L/min | 8.3 | 20 | 28 | 50.5 |

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

| | | | |
|-------------------|--------------|---------------|-------------------|
| 10 YEAR Guarantee | Low Pressure | Metal Backnut | Flow Straightener |
| Single Flow | | | |

Certifications


| | |
|------------------|--|
| 12.7 l/min | |
| Tested @ 0.2 bar | |



www.esteembathrooms.com

LOCA

E62023 – BATH TAP PAIR

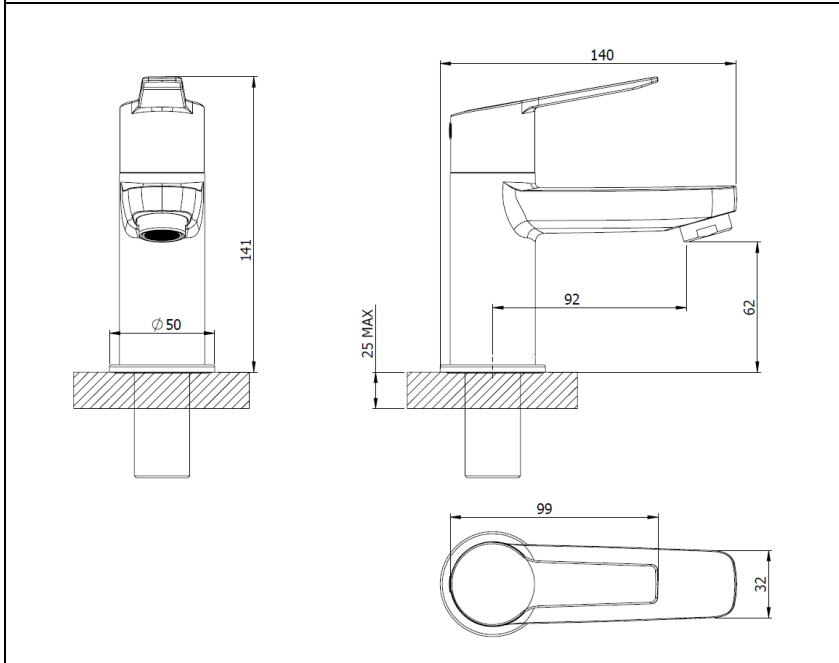

Specification

| | |
|------------|------------------------|
| Finish | Chrome |
| Body | Brass |
| Fittings | Metal backnut & washer |
| Connection | 3/4" BSP Threaded tail |




| | |
|-----------------------|------|
| Min dynamic pressure | 0.1 |
| Max dynamic pressure | 6 |
| Max static pressure | 16 |
| Max water temperature | 60°C |

Flow rates


| Pressure | 0.1 | 0.5 | 1 | 3 |
|----------|-----|------|------|-----|
| L/min | 8.1 | 26.2 | 45.9 | 105 |

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

| | | | |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
|  Guarantee |  Low Pressure |  Metal Backnut |  Flow Straightener |
|  Single Flow | | | |


Certifications


| | |
|---------------------------------------------------------------------------------------|--|
|  | |
| Tested @ 0.2 bar | |
| | |







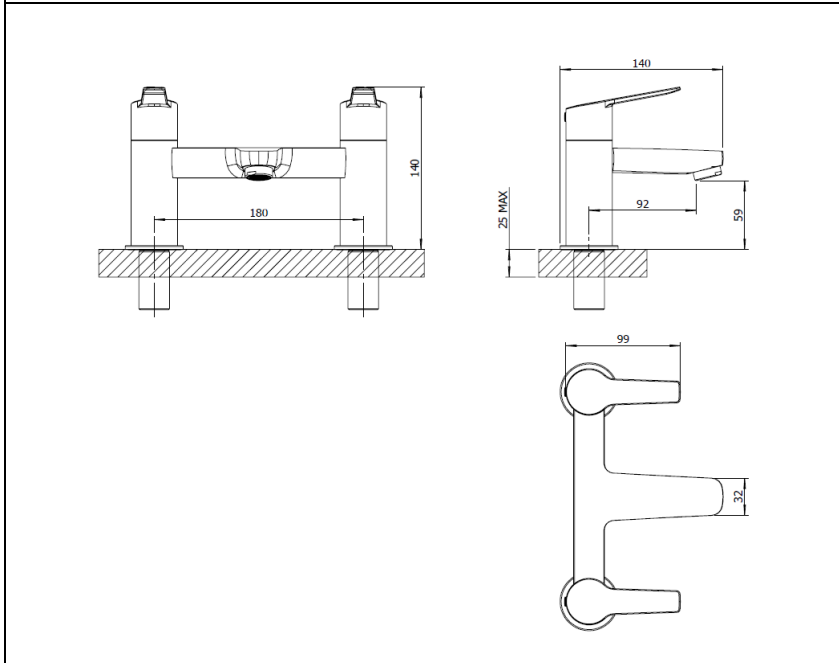

LOCA

E62024 – BATH FILLER




| Specification | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|------|------|
| Finish | Chrome | | | |
| Body | Brass | | | |
| Fittings | Brass backnut & washer | | | |
| Connection | 3/4" BSP Threaded tail | | | |
| Min dynamic pressure | | 0.1 | | |
| Max dynamic pressure | | 6 | | |
| Max static pressure | | 25 | | |
| Max water temperature | | 85°C | | |
| Flow rates | | | | |
| Pressure | 0.1 | 0.5 | 1 | 3 |
| L/min | 10 | 29.8 | 44.5 | 83.4 |
| <p>All Pressures in Bar. All flow in L/Min.</p> <p>Dimensions supplied are nominal and subject to tolerance.</p> <p>Inclusion or restrictors (sold separately unless stated) will affect flow rate result.</p> <p>Performance details are based on trials under test conditions and for guidance only.</p> <p>The Company reserves the right to change product specification without prior notice.</p> | | | | |
| Certifications | | | | |
|  | | | | |
| Tested @ 0.2bar | | | | |
| | | | | |
| | | | | |

| Features & Benefits | | | |
|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
|  <p>10 YEAR Guarantee</p> |  <p>L Low Pressure</p> |  <p>Metal Backnut</p> |  <p>Flow Straightener</p> |
|  <p>Flow Aerator</p> |  <p>Single Flow</p> | | |



LOCA

E62025 – BATH & SHOWER MIXER

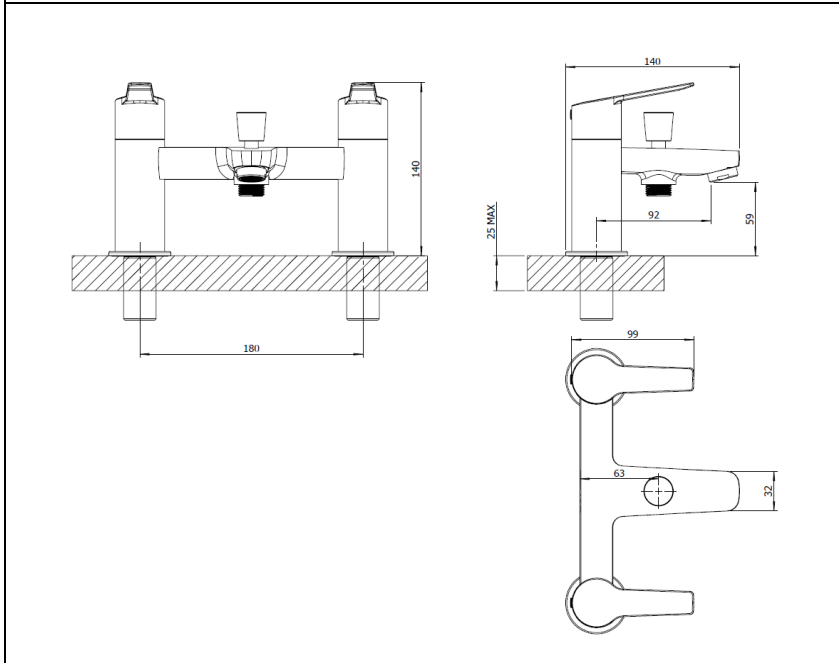

Specification








| | |
|-----------------------|------------------------|
| Finish | Chrome |
| Body | Brass |
| Fittings | Brass backnut & washer |
| Connection | 3/4" BSP Threaded tail |
| Min dynamic pressure | 0.1 |
| Max dynamic pressure | 6 |
| Max static pressure | 25 |
| Max water temperature | 85°C |

Flow rates


| Pressure | 0.1 | 0.5 | 1 | 3 |
|----------|-----|------|------|------|
| L/min | 6.9 | 21.4 | 31.2 | 55.2 |

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

| | | | |
|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
|  Guarantee |  Low Pressure |  Metal Backnut |  Flow Straightener |
|  Flow Aerator |  Shower Kit Included |  Single Flow | |

Certifications

| | |
|---------------------------------------------------------------------------------------|--|
|  | |
| Tested @ 0.2bar | |
| | |



www.esteembathrooms.com