


RISCO

E62010 – MONO BASIN MIXER



Specification

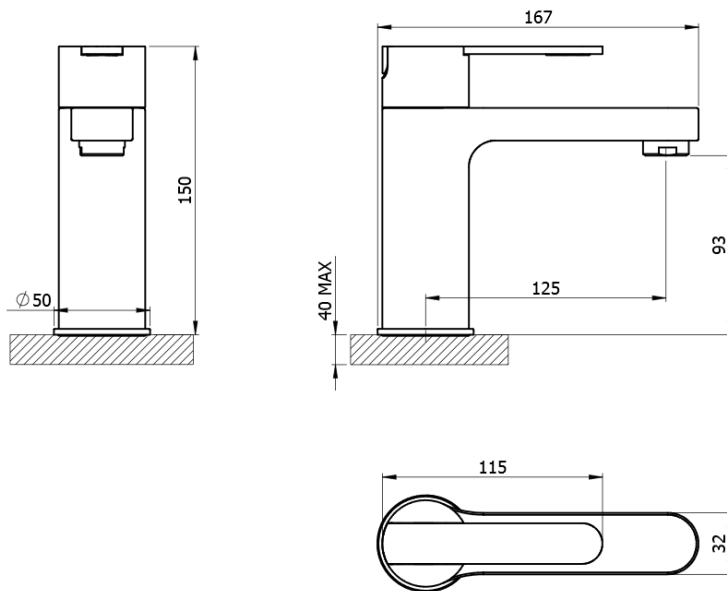






Finish	Matt Black
Body	Brass
Fittings	Metal plate, washer, stud & locking nut
Connection	M10 - DN8 Flexible hoses - 1/2" BSP threaded ends
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C

Flow rates


Pressure	0.1	0.5	1	3
Aerator	1.0	2.3	3.4	3.6
F/Straight	1.1	5.9	9.3	17.5

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

 Guarantee	 Low Pressure	 Flexible Hose	 Click Waste
 Flow Straightener	 Eco Aerator	 Single Flow	

Certifications




Tested @ 0.2bar



www.esteembathrooms.com

RISCO

E62011 – TALL MONO BASIN MIXER

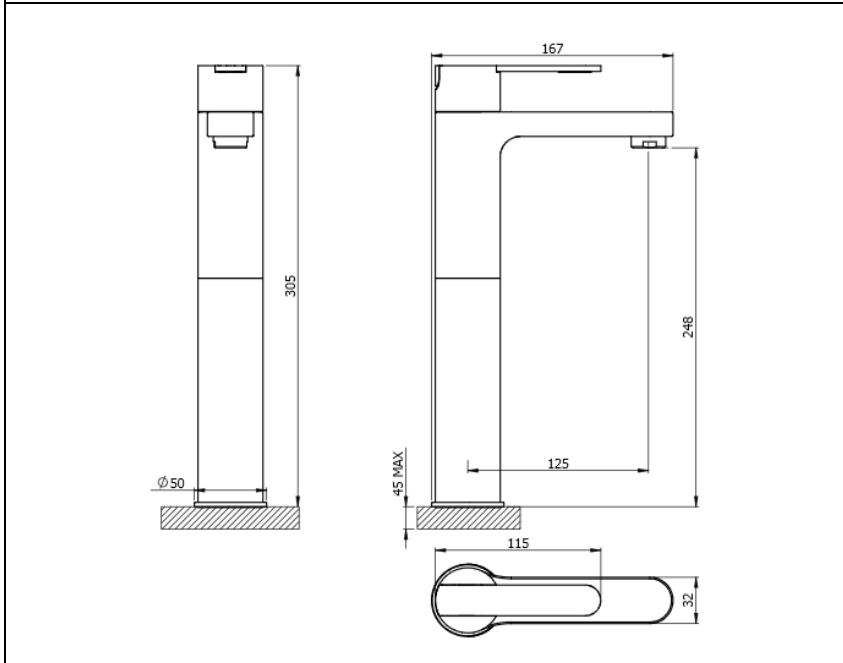

Specification








Finish	Matt Black
Body	Brass
Fittings	Metal plate, washer, stud & locking nut
Connection	M10 - DN8 Flexible hoses - 1/2" BSP threaded ends
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C

Flow rates


Pressure	0.1	0.5	1	3
Aerator	1.0	2.3	3.4	3.6
F/Straight	1.1	5.9	9.3	17.5

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

 Guarantee	 Low Pressure	 Flexible Hose	 Click Waste
 Flow Straightener	 Eco Aerator	 Single Flow	

Certifications


	
Tested @ 0.2bar	



www.esteembathrooms.com

RISCO

E62012 – WALL BASIN MIXER

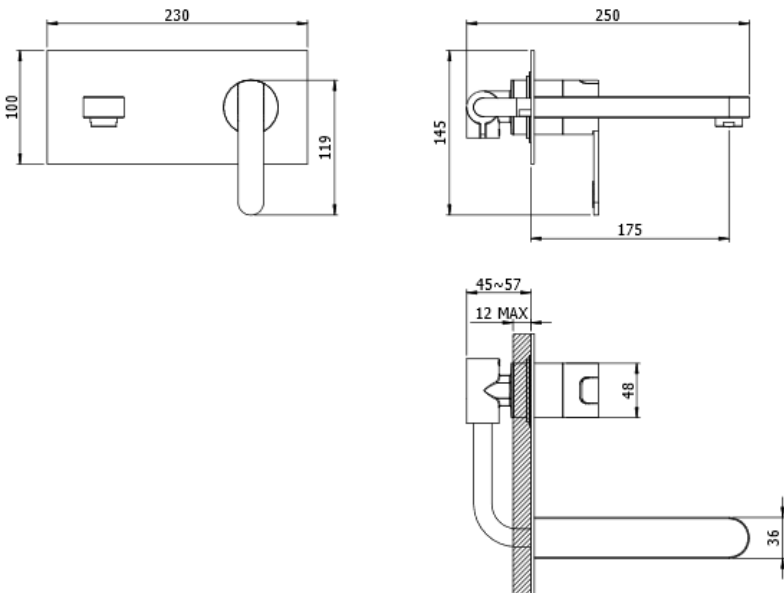

Specification

Finish	Matt Black
Body	Brass
Fittings	
Connection	
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C

Flow rates

Pressure	0.1	0.5	1	3
Aerator	2.1	2.6	3.1	2.9
F/Straight	2.6	10.5	15.4	28.1

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

10 YEAR Guarantee	Low Pressure	Click Waste	Flow Straightener
Flow Aerator	Single Flow		


Certifications

5.6 l/min	
Tested @ 0.2bar	



RISCO

E62013 – BATH FILLER

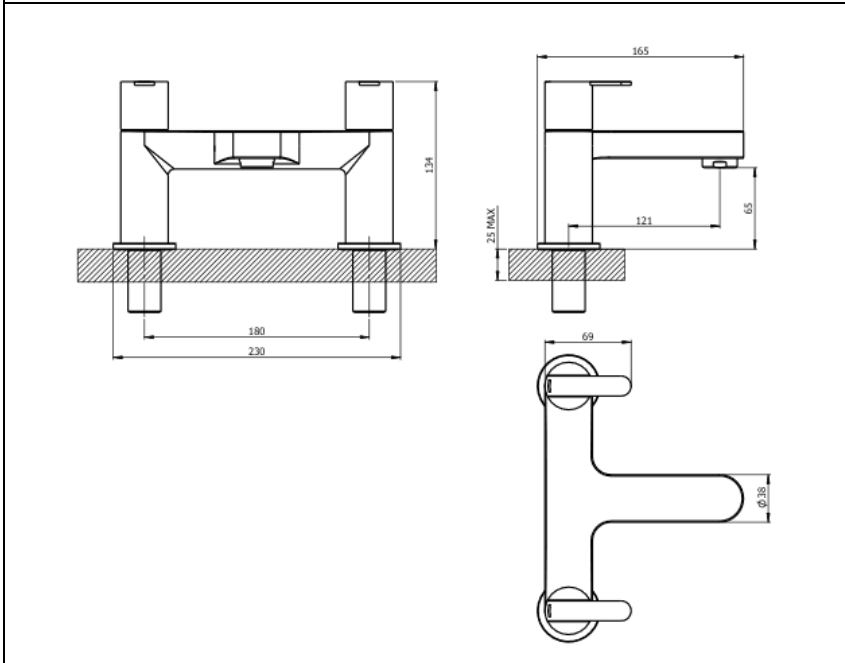

Specification

Finish	Matt Black
Body	Brass
Fittings	Brass backnut & washer
Connection	3/4" BSP Threaded tail
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	25
Max water temperature	60°C

Flow rates

Pressure	0.1	0.5	1	3
Aerator	5.3	13.3	19.0	35.0
F/Straight	11.4	35.4	51.1	89.9

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

10 YEAR Guarantee	Low Pressure	Brass Backnut	Flow Straightener
Flow Aerator	Single Flow		

Certifications


21.3 l/min	
Tested @ 0.2bar	



www.esteembathrooms.com

RISCO

E62014 – BATH & SHOWER MIXER

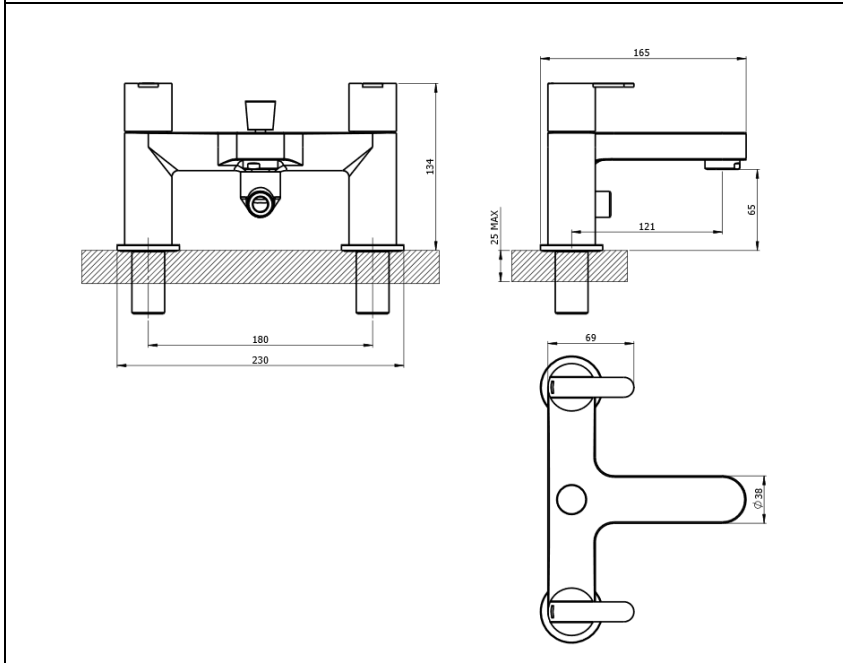

Specification

Finish	Matt Black
Body	Brass
Fittings	Brass backnut & washer
Connection	3/4" BSP Threaded tail
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	25
Max water temperature	60°C

Flow rates

Pressure	0.1	0.5	1	3
Aerator	6.4	12.9	18.9	33.5
F/Straight	9.2	27.9	39.9	69.7

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

10 YEAR Guarantee	Low Pressure	Brass Backnut	Flow Straightener
Flow Aerator	Shower Kit Included	Single Flow	


Certifications

17.0 l/min	
Tested @ 0.2bar	



RISCO

E62015 – WALL BATH FILLER

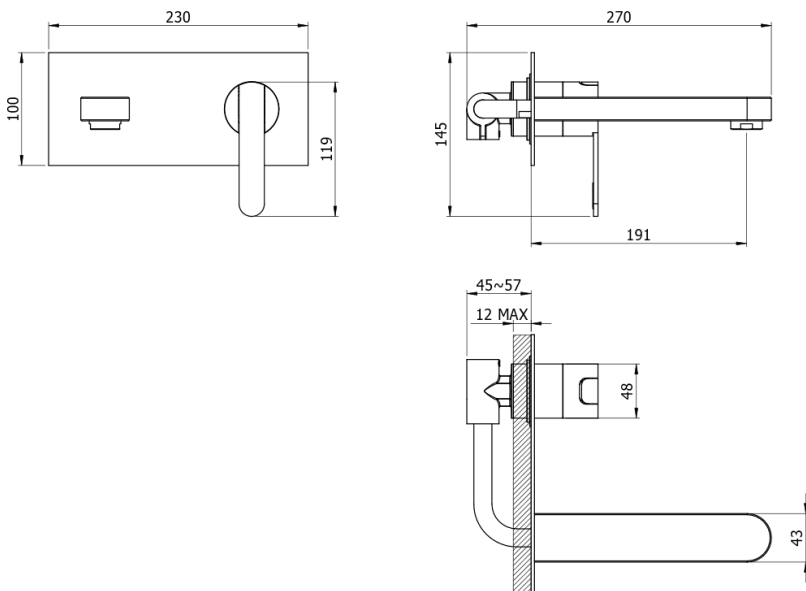

Specification

Finish	Matt Black
Body	Brass
Fittings	
Connection	
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C

Flow rates

Pressure	0.1	0.5	1	3
Aerator				
F/Straight	2.4	10.5	15.4	28.0

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

Guarantee	High Pressure	Flow Straightener	Single Flow

Certifications

Tested @ 3 bar	

